

High pressure washdown,

Suitable for a wide variety of industrial applications, streamlined, comfortable design.

Materials:

Forged brass housing, moulded plastic casing, stainless steel valve arrangement. special heat and chemical resistant seals for optimum performance even in the harshest environments.


Max working pressure : 275 bar (4000 psi).

Max temperature: 300° F (135° C).

Max flow rate: 10.5 GPM.

Inlet thread 3/8" BSP female.

Part No: NO-004-5SS

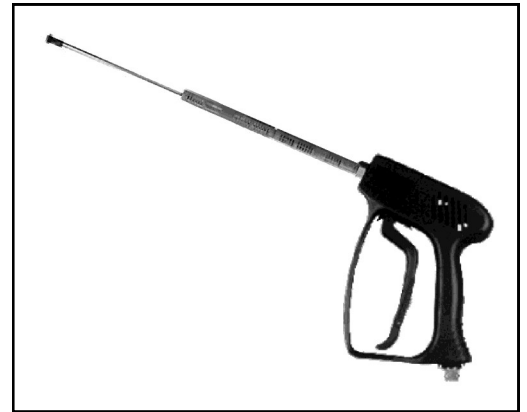

Low pressure washdown - Watergun.

Flow controlled by rear trigger action, partial depression for spray, full depression for jet. Automatic shut off on trigger release.

Materials:

Gunmetal construction with scuff resistant black rubber shroud.

Max working pressure : 27.5 bar (400 psi).

Max flow rate on spray: 12 GPM

Inlet thread 1/2" NPT fem.

Part No: NO-016-4G2



Low pressure washdown - Diffuser Nozzle.

Adjustable twist action through spray, straight-stream and shut off.

Material: Gunmetal

Max working pressure : 15 bar (217 psi).

Flow rate on spray: 36 GPM.

Flow rate on jet: 38 GPM.

Inlet thread 1.1/4" BSPP fem.

Part No: NO-020-6G1

