


2SN Double Wire Braid, Thin Cover

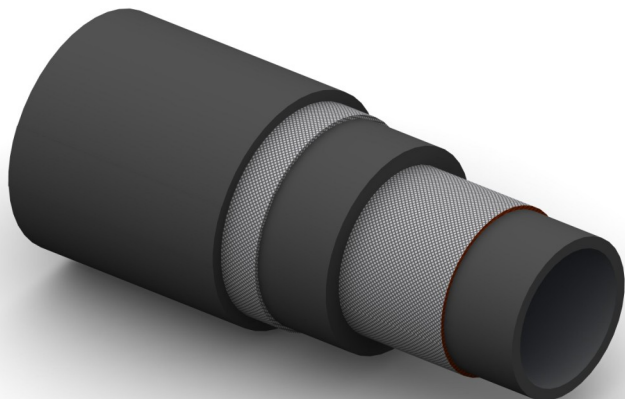

Construction:

Tube: Seamless Synthetic Rubber.

Reinforcement: 2 High Tensile Steel Wire Braid.

Cover: Black Synthetic Rubber; Weather, Oil, Fuel and Abrasion Resistant.

Temperature Range: -40°C To +100°C.
(+120°C Intermittent)

Meets or exceeds the requirements of SAE J517 100 R2 type AT - EN 853 2SN – ISO 1436
Meets flame resistance acceptance designation US MSHA IC - 152/1 & LOBA

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		mm	Bar	PSI	Bar		
2SN-03	4.8	3/16	14	415	6000	1650	23950	90	0.31
2SN-04	6.4	1/4	15	400	5800	1600	23200	100	0.33
2SN-05	8.0	5/16	17	350	5100	1400	20300	115	0.39
2SN-06	9.5	3/8	19	330	4800	1320	19150	130	0.50
2SN-08	12.7	1/2	23	275	4000	1100	15950	180	0.59
2SN-10	16.0	5/8	26	250	3600	1000	14500	200	0.71
2SN-12	19.0	3/4	30	215	3100	850	12350	240	0.86
2SN-16	25.4	1	38	165	2400	650	9450	300	1.28
2SN-20	32.0	1.1/4	49	125	1800	500	7250	420	2.02
2SN-24	38.0	1.1/2	55	90	1300	360	5250	500	2.32
2SN-32	50.8	2	68	80	1150	320	4650	630	2.85