


**4SH Four Spiral Wire**

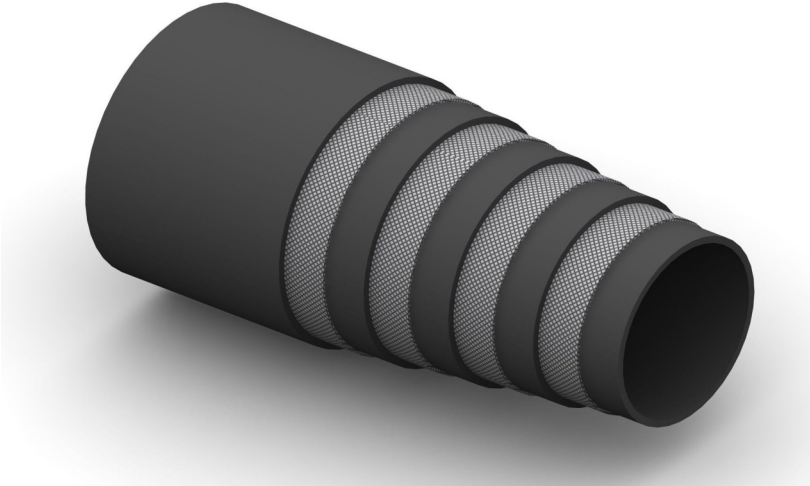

**Construction:**

**Tube:** Seamless Synthetic Rubber.

**Reinforcement:** 4 Spirals of High Tensile Wire.

**Cover:** Black Synthetic Rubber; Weather, Oil, Fuel and Abrasion Resistant.

**Temperature Range:** -40°C To +100°C. .  
 (+120°C Intermittent)

Meets or exceeds the requirements of EN 856 4SH and ISO 3862  
 Meets flame resistance acceptance designation US MSHA IC – 152/1 & LOBA

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		mm	Bar	PSI	Bar		
4SH-12	19.0	3/4	32	420	6090	1680	24360	280	1.53
4SH-16	25.4	1	39	380	5510	1520	22040	340	2.06
4SH-20	32.0	1.1/4	46	345	5000	1380	20000	460	2.46
4SH-24	38.0	1.1/2	54	290	4200	1160	16820	560	3.35
4SH-32	50.8	2	68	250	3625	1000	14500	700	4.55