


AT20S Compressed Air

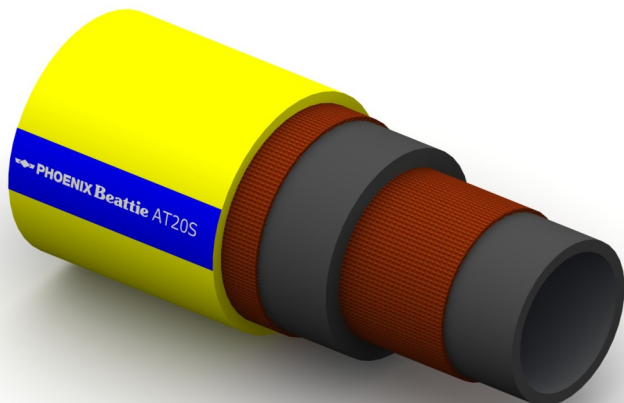

Construction:

Tube: Black NBR; Oil Mist Resistant.

Reinforcement: High Tensile Textile Cords.

Cover: Yellow NBR; Abrasion and Ozone Resistant.

Temperature Range: -35°C To +85°C.

Typical Application: Compressed Air, Designed for Heavy Duty Applications.

Branding:



Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		Bar	PSI	Bar	PSI		
AT20S-006	10	3/8	19	20	300	60	900	60	0.23
AT20S-008	13	1/2	23	20	300	60	900	78	0.39
AT20S-012	19	3/4	30	20	300	60	900	114	0.64
AT20S-016	25	1	37	20	300	60	900	150	0.80
AT20S-024	38	1.1/2	52	20	300	60	900	228	1.37
AT20S-032	51	2	67	20	300	60	900	306	2.09