


BM10H Bulk Material Suction and Delivery

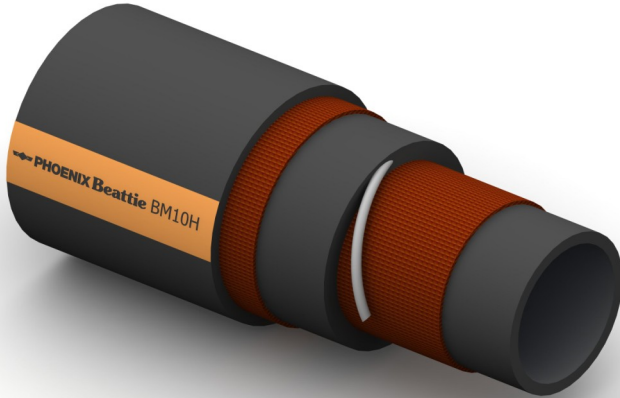

Construction:

Tube: Black SBR/NR Blend, Abrasion Resistant.

Reinforcement: High Tensile Textile Cords with Embedded Steel Helix Wire.

Cover: Black IR/BR Blend; Abrasion and Ozone Resistant.

Temperature Range: -35°C To +85°C.

Typical Application: Bulk Material Delivery. Specially designed for heavy duty Barite and Cement delivery to offshore platforms.

Branding:

Barite Service:

PHOENIX Beattie BM10H BULK MATERIAL SUCTION & DELIVERY WP 10 BAR 

Cement Service:

PHOENIX Beattie BM10H BULK MATERIAL SUCTION & DELIVERY WP 10 BAR 

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		mm	Bar	PSI	Bar		
BM10H-064	102	4	127	10	150	40	600	612	6.60
BM10H-080	127	5	152	10	150	40	600	762	8.20
BM10H-096	152	6	180	10	150	40	600	912	9.60
BM10H-160	254	10	291	10	150	40	600	1524	26.20