


BM10S Bulk Material Delivery

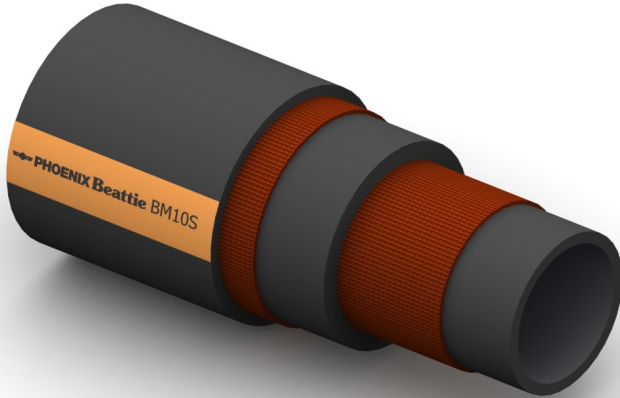

Construction:

Tube: Black SBR/NR Blend. Abrasion Resistant .

Reinforcement: High Tensile Textile Cords.

Cover: Black IR/BR Blend; Abrasion and Ozone Resistant.

Temperature Range: -35°C To +85°C.

Typical Application: Bulk Material Delivery. Specially designed for heavy duty Barite and Cement delivery to offshore platforms.

Branding:

Barite Service:  **PHOENIX Beattie BM10S BULK MATERIAL DELIVERY WP 10 BAR** 

Cement service:  **PHOENIX Beattie BM10S BULK MATERIAL DELIVERY WP 10 BAR** 

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		Bar	PSI	Bar	PSI		
BM10S-064	102	4	124	10	150	40	600	612	4.60
BM10S-080	127	5	149	10	150	40	600	762	5.70