


BM20H Bulk Material Suction and Delivery

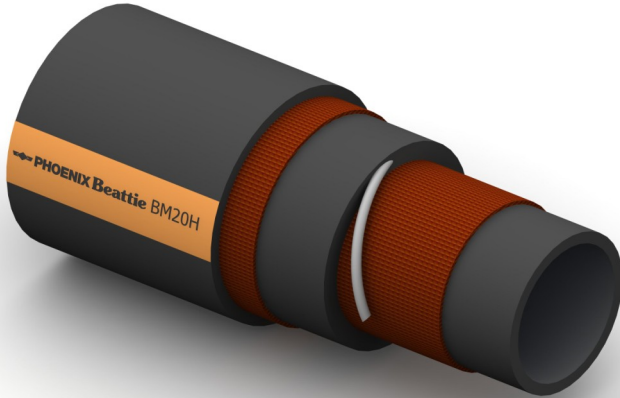

Construction:

Tube: Black SBR/NR Blend, Abrasion Resistant.

Reinforcement: High Tensile Textile Cords with Embedded Steel Helix Wire.

Cover: Black IR/BR Blend; Abrasion and Ozone Resistant.

Temperature Range: -35°C To +85°C.

Typical Application: Bulk Material Delivery. Specially designed for heavy duty Barite and Cement delivery to offshore platforms.

Branding:

Barite Service:

PHOENIX Beattie BM20H BULK MATERIAL SUCTION & DELIVERY WP 20 BAR 

Cement Service:

PHOENIX Beattie BM20H BULK MATERIAL SUCTION & DELIVERY WP 20 BAR 

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		Bar	PSI	Bar	PSI		
BM20H-064	102	4	130	20	300	80	1200	612	7.30
BM20H-080	127	5	156	20	300	80	1200	762	10.70