


BM20S Bulk Material Delivery

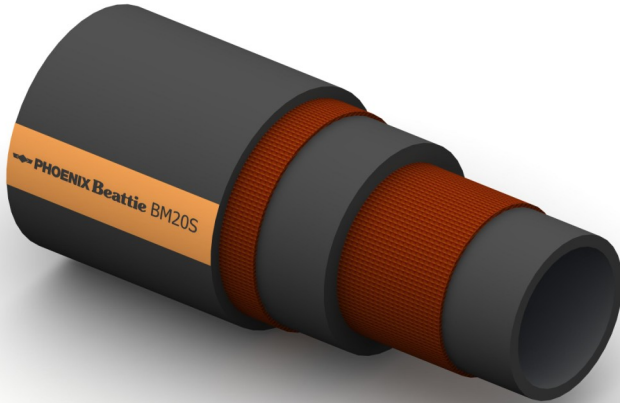

Construction:

Tube: Black SBR/NR Blend. Abrasion Resistant .

Reinforcement: High Tensile Textile Cords.

Cover: Black IR/BR Blend; Abrasion and Ozone Resistant.

Temperature Range: -35°C To +85°C.

Typical Application: Bulk Material Delivery. Specially designed for heavy duty Barite and Cement delivery to offshore platforms.

Branding:

Barite Service:  **PHOENIX Beattie BM20S BULK MATERIAL DELIVERY WP 20 BAR** 

Cement service:  **PHOENIX Beattie BM20S BULK MATERIAL DELIVERY WP 20 BAR** 

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		mm	Bar	PSI	Bar		
BM20S-064	102	4	128	20	300	80	1200	612	5.40
BM20S-080	127	5	153	20	300	80	1200	762	6.60