


BT10 Meets The Requirements Of SAE 100R11

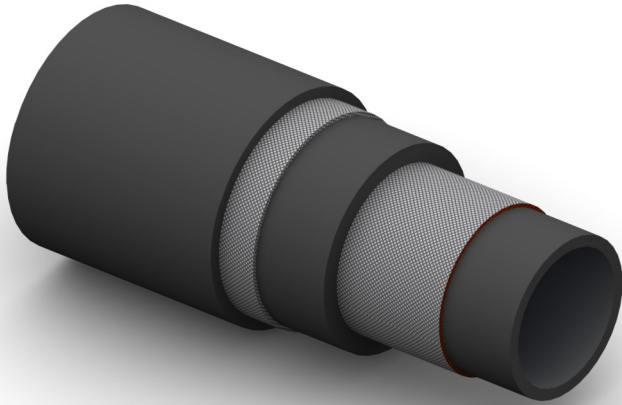

Construction:

Tube: Nylon 11

Reinforcement: Two Aramid Fibre Braids.

Cover: Chemical Resistant Nylon 11.
(Pin Pricked For Gas Applications)

Temperature Range: -40°C To +100°C.

Application: Suitable for many Industrial Gases, (eg. Helium, Air, Helox – Max 25% O₂) and Hydraulic Oils. Recommended for high pressure applications where low volumetric expansion and corrosion resistance is essential.

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		mm	Bar	PSI	Bar		
BT10-03	5	3/16	13.5	689	10000	2758	40000	38	0.12
BT10-04	6	1/4	14.5	689	10000	2758	40000	64	0.16
BT10-05	8	5/16	18.3	552	8000	2206	32000	76	0.20
BT10-06	10	3/8	19.3	517	7500	2068	30000	76	0.25
BT10-08	13	1/2	22.6	414	6000	1652	24000	100	0.35