


CP85S Concrete Pumping

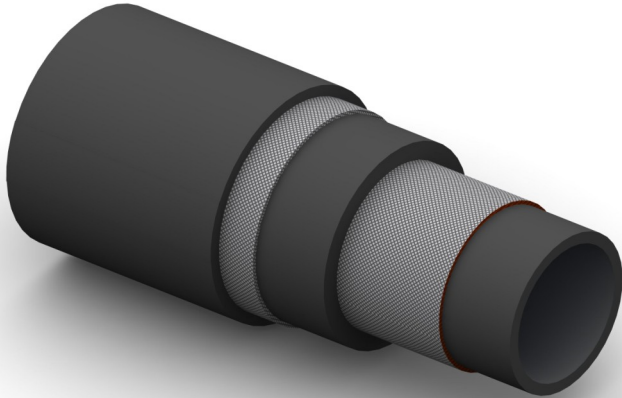

Construction:

Tube: Black Conductive NR, Abrasion Resistant.

Reinforcement: High Tensile Steel Cords.

Cover: Black Conductive SBR/NR Blend; Abrasion and Ozone Resistant.

Temperature Range: -35°C To +85°C.

Typical Application: High Pressure Concrete placement.

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		mm	Bar	PSI	Bar		
CP85S-032	51	2	68	85	1232	200	2900	508	3.41
CP85S-048	76	3	101	85	1232	200	2900	762	6.58
CP85S-064	102	4	129	85	1232	200	2900	1016	9.37
CP85S-080	127	5	156	85	1232	200	2900	1290	10.95