


LM40S Liquid Mud Delivery

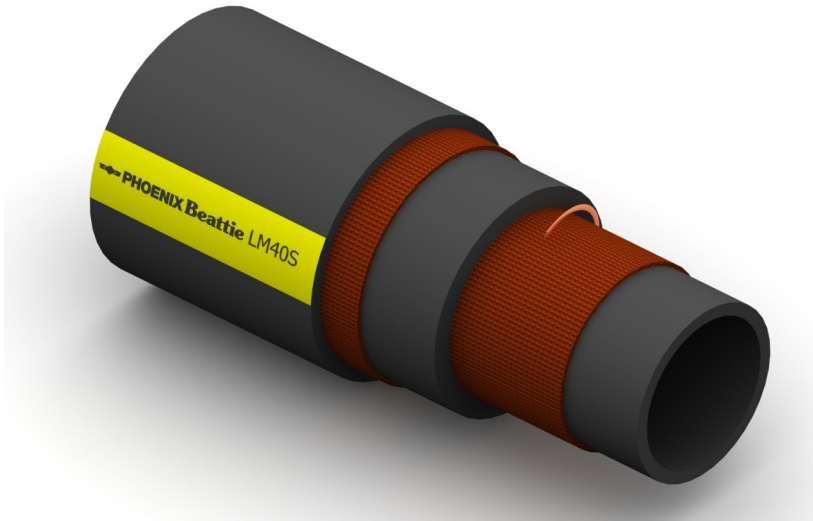

Construction:

Tube: Black NBR.

Reinforcement: High Tensile Textile Cords, Plus Antistatic Wire.

Cover: Black IR/BR Blend; Abrasion, Ozone and Hydrocarbon Resistant.

Temperature Range: -30°C To +100°C.

Typical Application: Liquid Mud containing Crude Oil and Grit delivery in offshore applications. Also suitable for Fuel delivery with up to 50% Aromatic Content

Branding:



Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		Bar	PSI	Bar	PSI		
LM40S-048	76	3	103	40	600	160	2400	456	4.30
LM40S-064	102	4	128	40	600	160	2400	612	5.60