


## NG20S Nitrogen

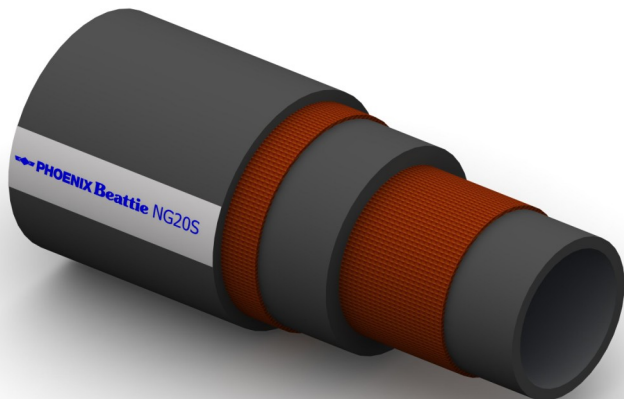

### Construction:

**Tube:** Black EPDM.

**Reinforcement:** High Tensile Textile Cords.

**Cover:** Black EPDM; Abrasion and Ozone Resistant.

**Temperature Range:** -40°C To +100°C.

**Typical Application:** Nitrogen.

**Branding:**

 **PHOENIX Beattie NG20S NITROGEN DELIVERY WP 20 BAR** 

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		Bar	PSI	Bar	PSI		
NG20S-006	10	3/8	17	20	300	60	900	60	0.23
NG20S-008	13	1/2	21	20	300	60	900	78	0.39
NG20S-012	19	3/4	28	20	300	60	900	114	0.64
NG20S-016	25	1	35	20	300	60	900	150	0.80
NG20S-024	38	1.1/2	52	20	300	60	900	228	1.11
NG20S-032	51	2	70	20	300	60	900	306	2.09