


**SUB SEA BOP HOSE
(Four Spiral Wire)**

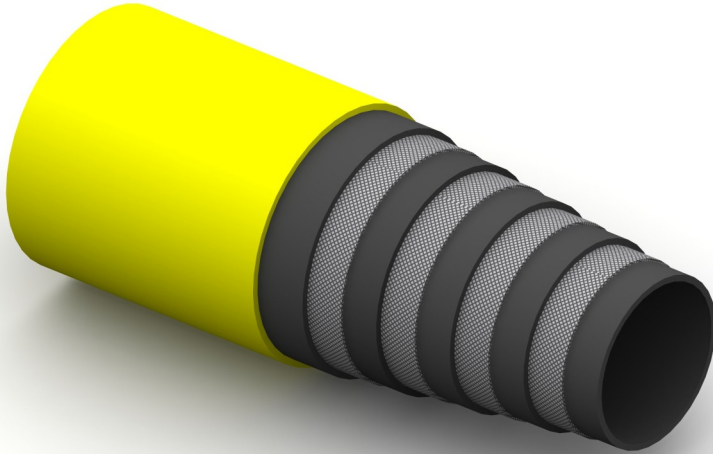

Construction:

Tube: Seamless Synthetic Rubber.

Reinforcement: 4 Spirals of High Tensile Wire.

Cover: Black Synthetic Rubber; Weather, Oil, Fuel and Abrasion Resistant.

Outer Cover: 3mm Thick Yellow or Blue Polyurethane. (Part No to be suffixed Y or B as required i.e. 4SSB-08Y or 4SSB-08B)

Temperature Range: -40°C To +100°C, In Constant Operation (Max Intermittent Temp +125°C)

Meets or exceeds the requirements of SAE J517 100 R10 – EN 856 4SP – ISO 3862 for sizes 1/2" & 3/4" ID.
Meets or exceeds the requirements of EN 856 4SH – ISO 3862 for sizes 1" & 1.1/2" ID.

Part No	Inside Dia		O.D.	Working Pressure		Minimum Burst Pressure		Min Bend Rad	Weight
	mm	Inch		Bar	PSI	Bar	PSI		
4SSB-08	12.7	1/2	28	415	6000	1660	24000	230	1.00
4SSB-12	19.0	3/4	35	420	6095	1680	24400	300	1.60
4SSB-16	25.4	1	42	380	5515	1520	22000	340	2.15
4SSB-24	38.0	1.1/2	57	290	4200	1160	16800	560	3.43

END FITTING:

The hose end fitting design ensures against water ingress beneath the Polyurethane outer cover -

